




FRONT VIEW



SIDE VIEW

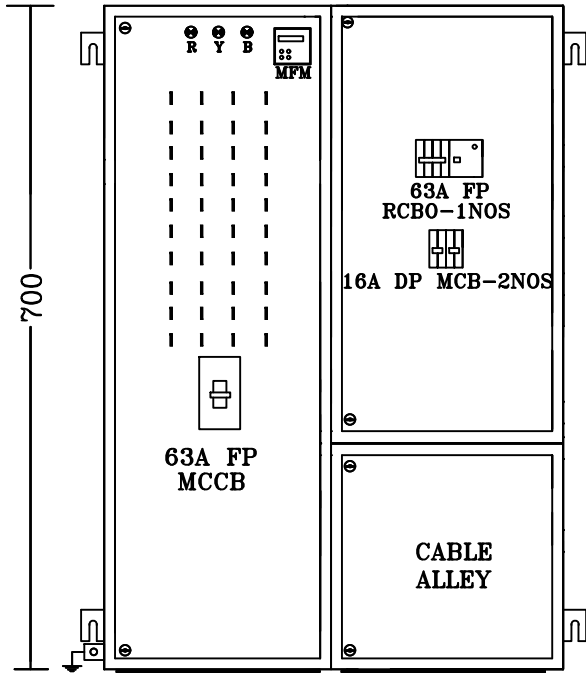

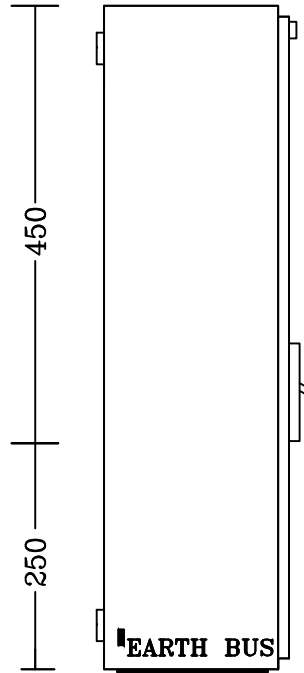

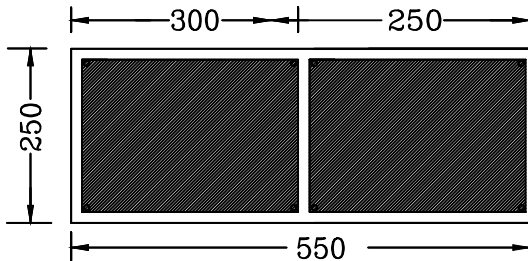
QTY-4NOS






FOUNDATION VIEW

General Notes :

1. All dimensions are in mm. unless otherwise stated.
2. The panel will be made on 2mm. thick crca sheet steel.
3. Degree of protection : IP-52.
4. All opening shall be covered by foam rubber gasket.
5. The panel will be painted by siemens gray RAL-7032.
6. Feeder/board tally plates are of anodised with engraved lettering.
7. Door shall be earthed with pvc insulated multistrand copper wire.
8. Copper busbar size: 20 x 04 tinned copper busbar for phases.
20 x 04 tinned copper busbar for neutral.
25 x 06 AL. bus for earthing.
9. Control-2.5sq. & Ct wiring-2.5sq. fr. copper wire (Gloster/Bonton/Anchor).
10. Incoming & Outgoing-Bottom Entry
11. Panel Weight -50kg (APPROX)

	NAME	DATE	<div>Owner-</div> <div></div>	<div>MFG.BY :</div> <div></div> <div>AMIT PROJECT & CONTROLS KOLKATA (CPRI TESTED) AN ISO-9001 : 2008 COMPANY 8 PAGLADANGA ROAD,KOL-105</div>	<div>Project-CONSTRUCTION OF MULTI-STORIED BUILDING FOR BANK OF INDIA ON BANK'S PLOT NO. CBD-87, AT FINANCIAL HUB AREA AT NEWTOWN, RAJARHAT, KOLKATA, WEST BENGAL-700135</div>	<div>DRG. NO.</div> <div>APC022/AC/4765</div>		
DRAWN	S.G	31.12.2022				<div>SHEET: 1 OF 3</div> <div>TOTAL SHEET : 3</div>		
CHECKED	P.K.B	31.12.2022	<div>ARCHITECT & PMC:</div> <div></div>	<div>CONTRACTOR:M/S. SUBIR ENGINEERING WORKS (P) LIMITED</div>	<div>TITLE:</div> <div>LIFT PANEL</div>	SCALE: NTS	REV.-0	DATE:
APPROVED	N.D	31.12.2022					REV.-1	DATE:
							REV.-2	DATE:
							REV.-3	DATE:

4.00	LIFT PANEL (QTY - 4)			
	INCOMER FEEDER			
1	63A 4P 25KA MCCB TM RELEASE	1	NOS	L&T
2	MULTIFUNCTION METER	1	NOS	L&T
3	LED INDICATION LAMP (R/Y/B)	1	SET	ESBEE AS L&T
4	CT 75/5A CL-1, VA-5 TAPE WOUND TYPE	3	NOS	KAPPA
5	6A SP MCB	3	NOS	L&T
6	SPD TYPE-II, 15KA	1	NOS	L&T/Siemens
7	32A 4P MCB 10KA "C CURVE"	1	NOS	L&T
	OUTGOING FEEDER			
1	63A 4P RCBO 300MA	1	NOS	L&T
2	16A DP MCB 10KA "C CURVE"	2	NOS	L&T

	NAME	DATE	Owner-		MFG.BY :		KOLKATA (CPRI TESTED) AN ISO-9001 : 2008 COMPANY 8 PAGLADANGA ROAD,KOL-105	Project-CONSTRUCTION OF MULTI-STORIED BUILDING FOR BANK OF INDIA ON BANK'S PLOT NO. CBD-87, AT FINANCIAL HUB AREA AT NEWTOWN, RAJARHAT, KOLKATA, WEST BENGAL-700135	DRG. NO. APC022/AC/4765								
DRAWN	S.GOSWAMI	31.12.2022							SHEET: 3 OF 3								
CHECKED	P.K.B	31.12.2022	ARCHITECT & PMC:		CONTRACTOR:M/S. SUBIR ENGINEERING WORKS (P) LIMITED	TITLE:	LIFT PANEL	NOT TO SCALE	<table border="1"> <tr> <td>REV.-0</td> <td>DATE:</td> </tr> <tr> <td>REV.-1</td> <td>DATE:</td> </tr> <tr> <td>REV.-2</td> <td>DATE:</td> </tr> <tr> <td>REV.-3</td> <td>DATE:</td> </tr> </table>	REV.-0	DATE:	REV.-1	DATE:	REV.-2	DATE:	REV.-3	DATE:
REV.-0	DATE:																
REV.-1	DATE:																
REV.-2	DATE:																
REV.-3	DATE:																
APPROVED	N.D	31.12.2022							TOTAL SHEET : 3								